


DATA SHEET DS/282	SISTEME DE MARCARE RO <small>CM Grafoplast® Distributor Autorizat</small>	PRINT SYSTEM TAGS FOR CABLES	DATE: 08.05.2006
-----------------------------	---	---	---------------------

GRAPHIC REPRESENTATION

SI2K02..../10N/12N/15N/18N

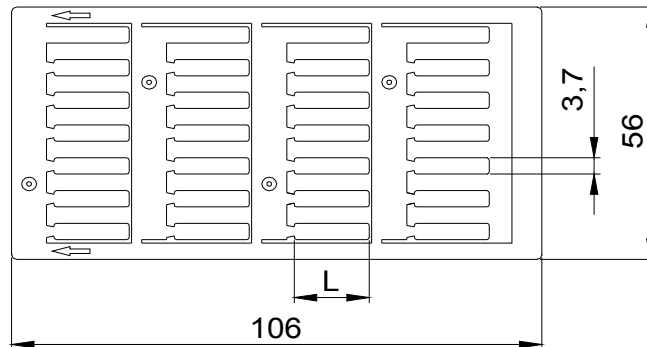

REFERENCE ITEM CODE

SI2K02W/10N - SI2K02W/10NMC - SI2K02Y/10N - SI2K02W/12N - SI2K02W/12NMC - SI2K02Y/12N - SI2K02W/15N - SI2K02W/15NMC - SI2K02Y/15N - SI2K02W/18N - SI2K02Y/18N - SI2K02WYW/18N

PHYSICAL PROPERTIES	W SERIES	Y SERIES
MATERIAL	BYBLEND ABS-PC	BYBLEND ABS-PC
COLOR	WHITE	YELLOW
OPERATIVE TEMPERATURE	- 50 ÷ +80 °C (-58 ÷ +176 °F)	- 50 ÷ +80 °C (-58 ÷ +176 °F)
SELF-EXTINGUISHABILITY	VO Class (UL - 94)	VO Class (UL - 94)
TOXIN FREE (ROHS CONFORMITY)	PCB - PCT - PBB -PBDO - VC (press. 1ppm)	PCB - PCT - PBB -PBDO - VC (press. 1ppm)
HALOGEN FREE	YES	YES
ACID RESISTANT	☺	☺
WATERPROOF	☺	☺
OIL RESISTANT	☺	☺
DUST RESISTANT	☺	☺

ITEM CODE	Tag length L (mm)	Q.ty of characters printable		Tags per box	Modules per box	Tags per module
		(*)	(**)			
SI2K02W/10N-SI2K02Y/10N	10	6	7	1152	32	36
SI2K02W/10NMC				3600	100	
SI2K02W/12N-SI2K02Y/12N	12	7	10	960	32	30
SI2K02W/12NMC				3000	100	
SI2K02W/15N-SI2K02Y/15N	15	8	12	768	32	24
SI2K02W/15NMC				2400	100	
SI2K02W/18N-SI2K02Y/18N	18	10	14	576	32	18
SI2K02WYW/18N	18	(***)		576	32	18

NOTES: (*) Standard character - ARIAL Normal, height 7 ; (**) Compressed character - ARIAL Normal.
 (***) Two-coloured tags (white / yellow / white) - Number of printable characters: 4 + 2 + 3 . Utilized ribbons : SI2KSBN/R (black ribbon) , SI2KRBN/R (red ribbon)

PREPARED BY:	APPR. BY:	DATE:	REVISION SUBJECT	PAGES
Marco Montecucco	SA:		ADDED ITEMS SI2K02./...MC	1 out of 1